


### APPLICATION

Throttle/check valve type Z2FS6... is used to control main flow rate (or pilot flow rate) in one direction of flow and to allow free flow in the opposite direction. The valve may be designed as double version (twin version - valve function is realized in two ports **A** and **B**) or single version (valve function is realized in one port **A** or **B**). The valve is applied to vertical stack mounting (sandwich plate) - generally is fitted between subplate and directional valve of the same nominal size and in this case is used to limit main flow rate (to control the speed of a receiver movement). For directional valves pilot operated the valve is installed as a pilot choke adjuster (to limit pilot flow rate). In this case it is fitted between the main and the pilot valve.



### DESCRIPTION OF OPERATION

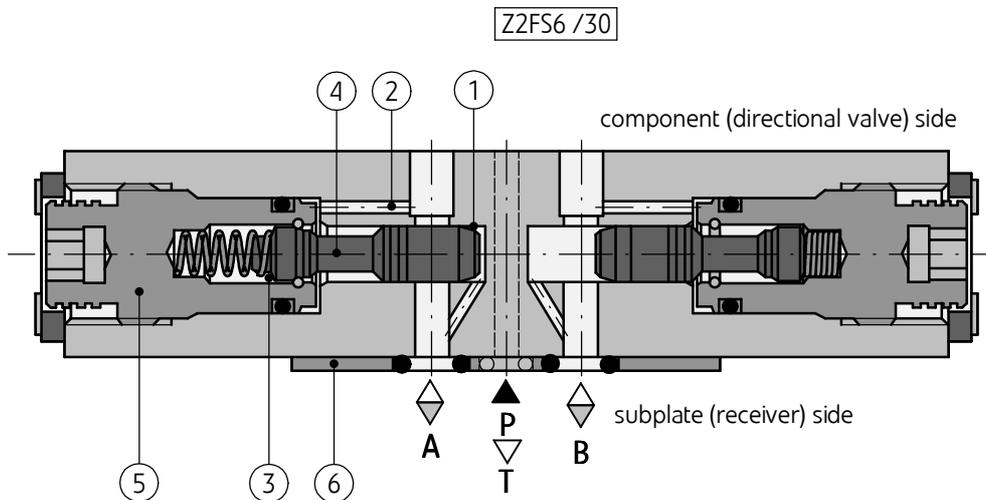

Hydraulic fluid from directional valve via port **A** (or **B**) flows to receiver through throttling slot (1). At the same time the fluid under operating pressure acts via line **A** on spring loaded side of spool (4). The spool (4) is thus hold in the throttle position by both spring and hydrostatic force.. Hydraulic fluid flowing back from a receiver through port **B** (or **A**) shifts the spool (4) in the direction of adjustment and allows the fluid to flow

freely (the valve operates as a check valve). Throttle rate (volume of fluid flow) can be adjusted by means of adjustment screw (5). Depending on the way the valve is fitted in relation to the seal ring plate (6), throttling effect can be achieved either in the supply of a receiver (option shown on the drawing) or drain (by rotating the valve about the longitudinal horizontal axis by 180°).


## TECHNICAL DATA

Hydraulic fluid	mineral oil	
<b>Required filtration</b>	<b>up to 16 μm</b>	
Recommended filtration	up to 10 μm	
Nominal fluid viscosity	37 mm <sup>2</sup> /s at temperature 55 °C	
Viscosity range	2,8 up to 380 mm <sup>2</sup> /s	
Fluid temperature range (in a tank)	recommended	40°C up to 55°C
	max	-20°C up to +70°C
Ambient temperature range	-20°C up to +70°C	
<b>Maximum operating pressure</b>	<b>31,5 MPa</b>	
<b>Cracking pressure</b>	<b>0,06 MPa</b>	
<b>Maximum flow</b>	<b>40 dm<sup>3</sup>/ min</b>	
Weight	0,8 kg	


## SCHEMES

Hydraulic schemes of valves type Z2FS6...


double version Z2FS6... (supply throttling)

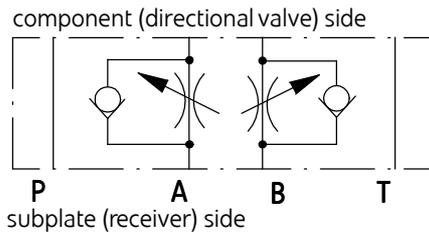


double version Z2FS6... (drain throttling)

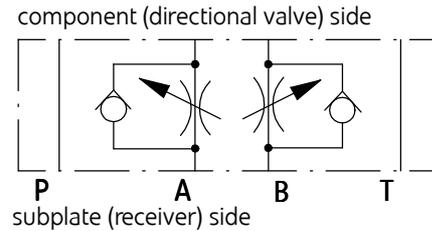


single version Z2FS6A... (supply throttling)

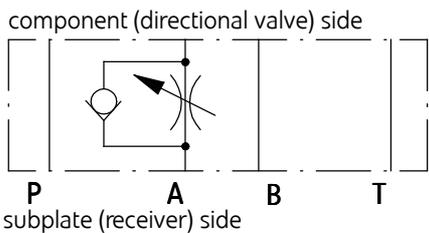


single version Z2FS6A... (drain throttling)

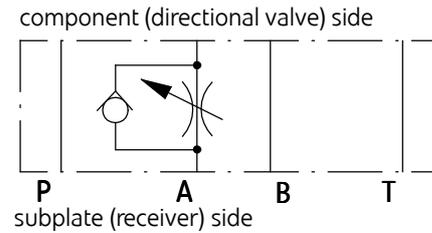

single version Z2FS6B... (supply throttling)




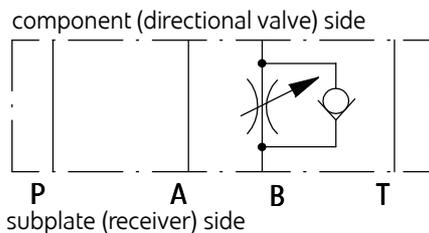


single version Z2FS6B... (drain throttling)

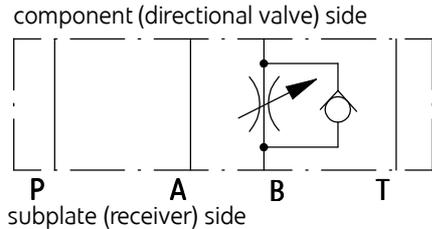

# OVERALL AND CONNECTION DIMENSIONS

double version Z2FS6...

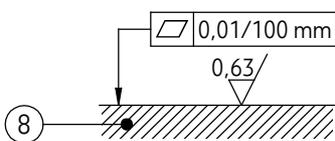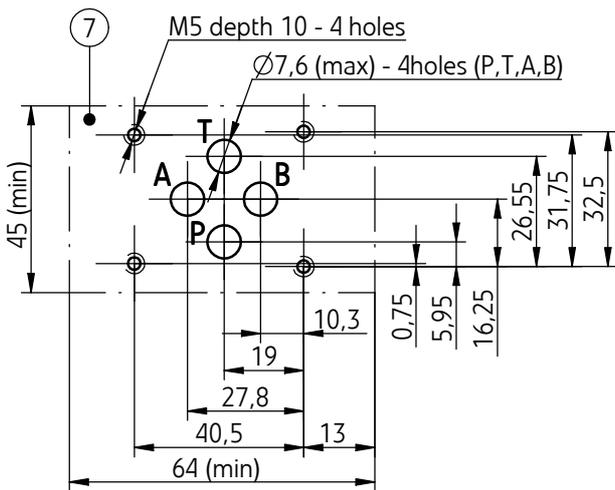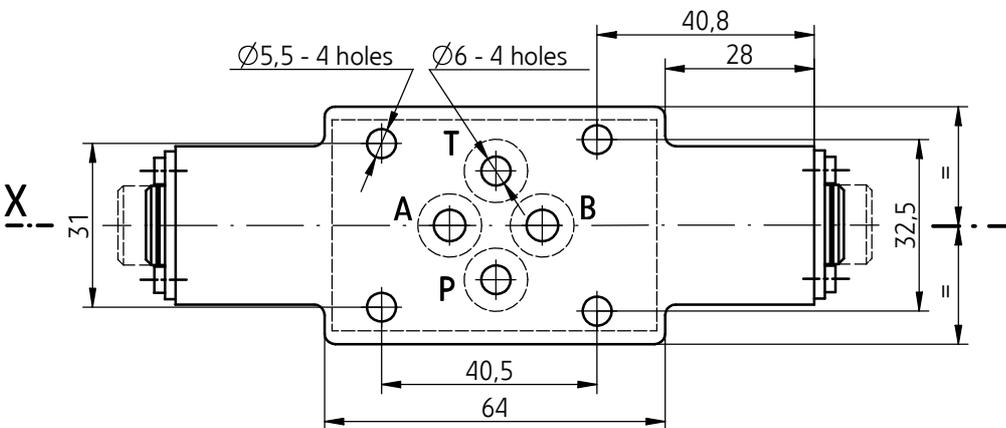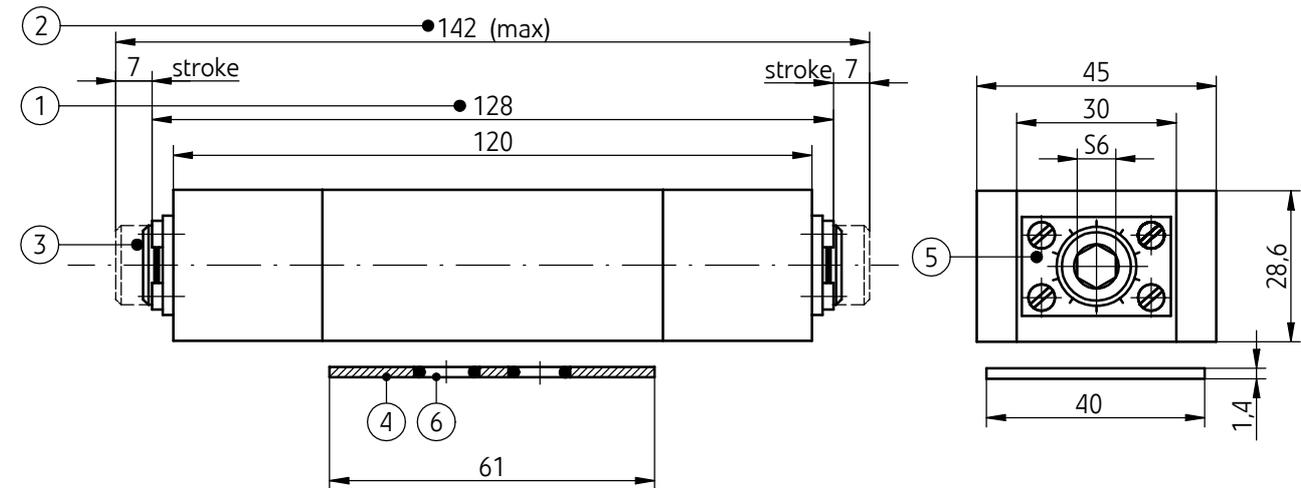



- 1,2 - Overall dimensions for the valve version Z2FS6... with throttling effect in ports **A, B**
- 3 - Adjustment screw; rotation to the right - increasing flow throttling effect; rotation to the left - decreasing flow throttling effect
- 4 - Seal ring plate - enables to arrange throttling effect in the supply or in the drain by changing the way in which the valve is fitted in relation to the plate - rotation the valve about the axis X by 180° (see examples on page 5)
- 5 - Plate with adjustment scale and valve scheme
- 6 - Seal **o-ring 9,2 x 1,8** - 4 pcs/kit (P, T, A, B)
- 7 - Mounting holes configuration of a subplate in accordance with the standards listed below:
  - **CETOP RP 121H** - symbol **CETOP 4.2-4-03** (nominal size **CETOP 03**)
  - **ISO 4401** - symbol **ISO 4401-03-02-0-94**
- fixing screws **M5 x L\*** - 10.9 - 4 pcs/kit in accordance with **PN - EN ISO 4762**
- tightening torque **Md = 9 Nm**
- 8 - Required surface finish of a subplate

**NOTE:**

(\*) - Required length of the screws **L** is related to type and the number of hydraulic components sandwich fitted

# OVERALL AND CONNECTION DIMENSIONS

single versions: Z2FS6A...; Z2FS6B...

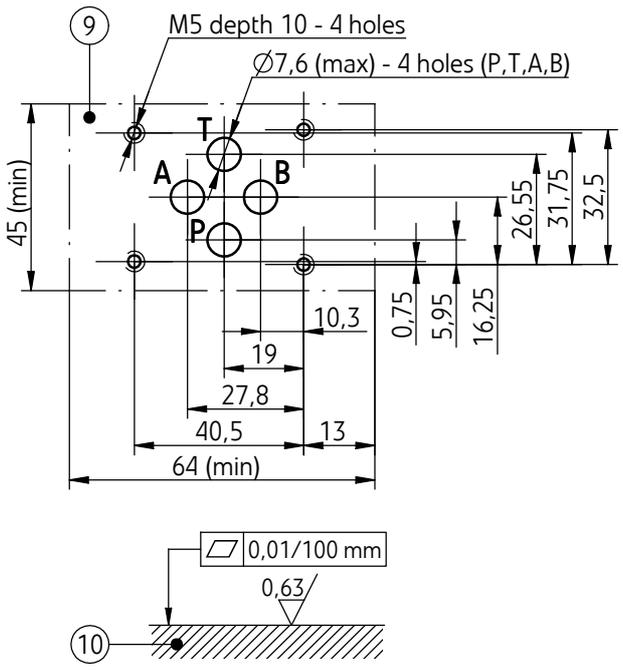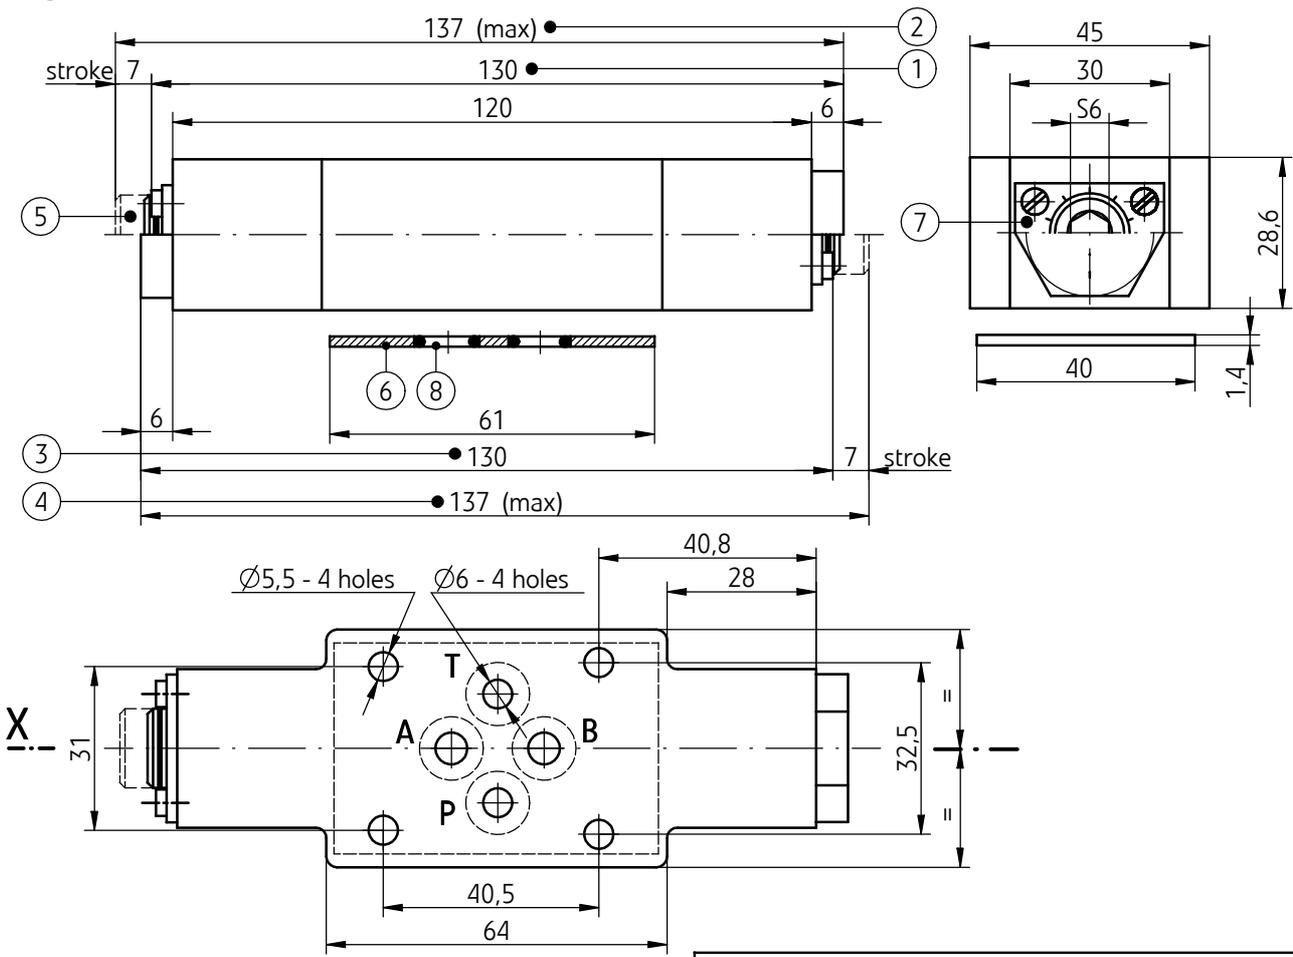


- 1,2 - Overall dimensions for the valve version Z2FS6A... with throttling effect in port **A**
  - 3,4 - Overall dimensions for the valve version Z2FS6B... with throttling effect in port **B**
  - 5 - Adjustment screw; rotation to the right - increasing flow throttling effect; rotation to the left - decreasing flow throttling effect
  - 6 - Seal ring plate - enables to arrange throttling effect in the supply or in the drain by changing the way in which the valve is fitted in relation to the plate - rotation the valve about the axis X by 180° (see examples on page 5)
  - 7 - Plate with adjustment scale and valve scheme
  - 8 - Seal **o-ring 9,2 x 1,8** - 4 pcs/kit (**P, T, A, B**)
  - 9 - Mounting holes configuration of a subplate in accordance with the standards listed below:
    - **CETOP RP 121H** - symbol **CETOP 4.2-4-03** (nominal size **CETOP 03**)
    - **ISO 4401** - symbol **ISO 4401-03-02-0-94**
  - fixing screws **M5 x L\*** - 10.9 - 4 pcs/kit in accordance with **PN - EN ISO 4762** tightening torque **Md = 9 Nm**
  - 10 - Required surface finish of a subplate
- NOTE:**  
 (\*) - Required length of the screws **L** is related to type and the number of hydraulic components sandwich fitted


## PERFORMANCE CURVES

measured at viscosity  $\nu = 41 \text{ mm}^2/\text{s}$  and temperature  $t = 50^\circ\text{C}$

Characteristic curves  $\Delta p(Q)$  for the valve type Z2FS6... for various throttle settings

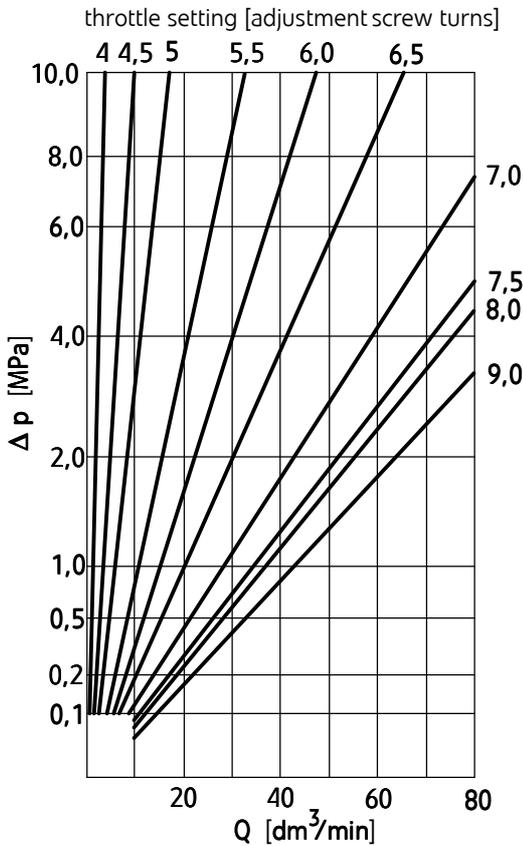


Flow resistance curves  $\Delta p(Q)$  for the check valve

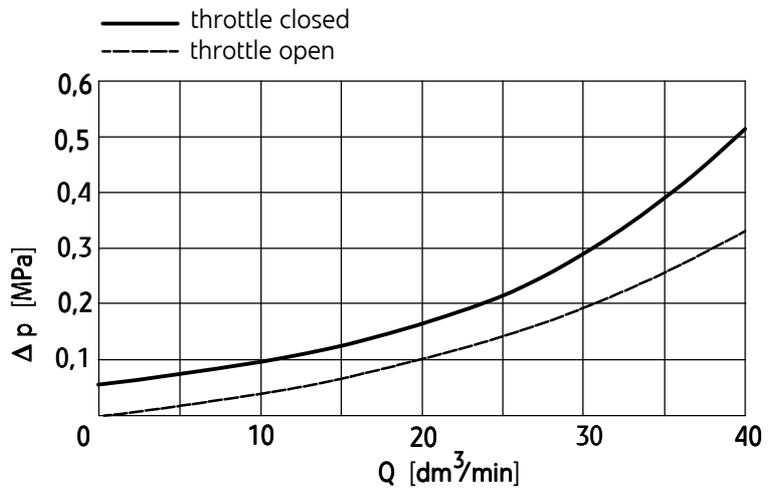


## EXAMPLES OF APPLICATION IN HYDRAULIC SYSTEM

Flow throttling in the supply of the receiver (actuator)

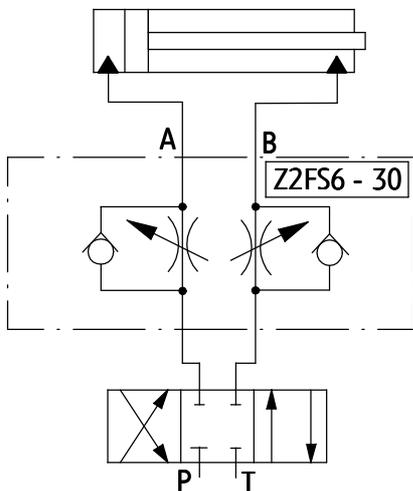

Flow throttling in the drain of the receiver (actuator) - valve fitted in rotated position by 180°

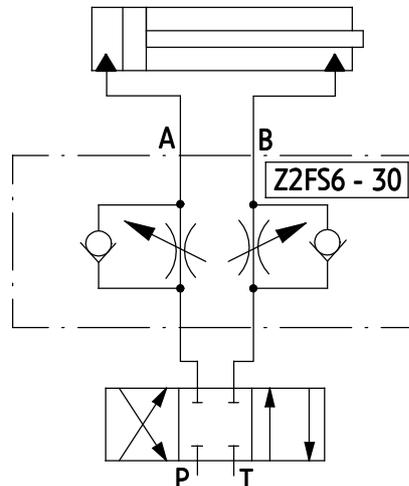

## HOW TO ORDER

<b>Z2FS</b>		<b>6</b>	/		<b>*</b>
<b>Nominal size (NS)</b> <b>NS6</b>		<b>= 6</b>			
<b>Throttling location</b> (hydraulic schemes on page 2) <b>throttle valves on the side of ports A and B</b>		<b>= no code</b>			
throttle valve on the side of port A		= A			
throttle valve on the side of port B		= B			
<b>Series number</b> (30-39) - connection and installation dimensions unchanged		<b>= 3X</b>			
<b>series 30</b>		<b>= 30</b>			
<b>Sealing</b> <b>NBR</b> (for fluids on mineral oil base)		<b>= no code</b>			
FKM (for fluids on phosphate ester base)		= V			
Further requirements in clear text (to be agreed with the manufacturer)					

### NOTES:

The throttle/check valve should be ordered according to the above coding.

The symbols in bold are the preferred versions available in short delivery time.

Coding example: Z2FS6 A/30

## SUBPLATES AND FIXING SCREWS

Subplates must be ordered according to catalogue sheet **WK 496 480**. Subplate symbols:

- G 341/01** - threaded connections **G 1/4**
- G 342/01 - threaded connections G 3/8
- G 502/01 - threaded connections G 1/2
- G 341/02 - threaded connections M14 x 1,5
- G 342/02 - threaded connections M16 x 1,5

Subplates and screws fixing the throttle/check valve **M5 x L\* - 10,9** - 4 pcs/kit in accordance with **PN - EN ISO 4762** must be ordered separately. Tightening torque **Md = 9 Nm**

### NOTES:

(\*) - Required length of the screws L is related to type and the number of hydraulic components sandwich fitted.

The subplate symbol in bold is the preferred version available in short delivery time.

PONAR Wadowice S.A.  
ul. Wojska Polskiego 29  
34-100 Wadowice  
tel. +48 33 488 21 00  
fax. +48 33 488 21 03  
[www.ponar-wadowice.pl](http://www.ponar-wadowice.pl)

